



AUSTRAL FLOOR SAFES

EXPLOSIVE, DRILL AND FORCE RESISTING (EDF) INGROUND FLOOR SAFES

STANDARD FEATURES

DOOR: Heavy cast high-tensile steel construction fully chromium plated. Door section is secured below 25mm thick steel top plate. Special hinge is to move heavy door only and is not part of security.

LOCKING: 1 million change combination lock mounted on hardened steel, drill resistant plate.


Two spring loaded relocking devices incorporated in door and lock.

BODY: Heavy gauge steel with 25mm thick steel top plate machined to accept door with minimum of tolerance.

HINGES: Hinged door for ease of operation. (Doors are interchangeable).

LID: Heavy steel lid (not shown), fits flush with top of safe.

Deposit chute may be fitted if required.

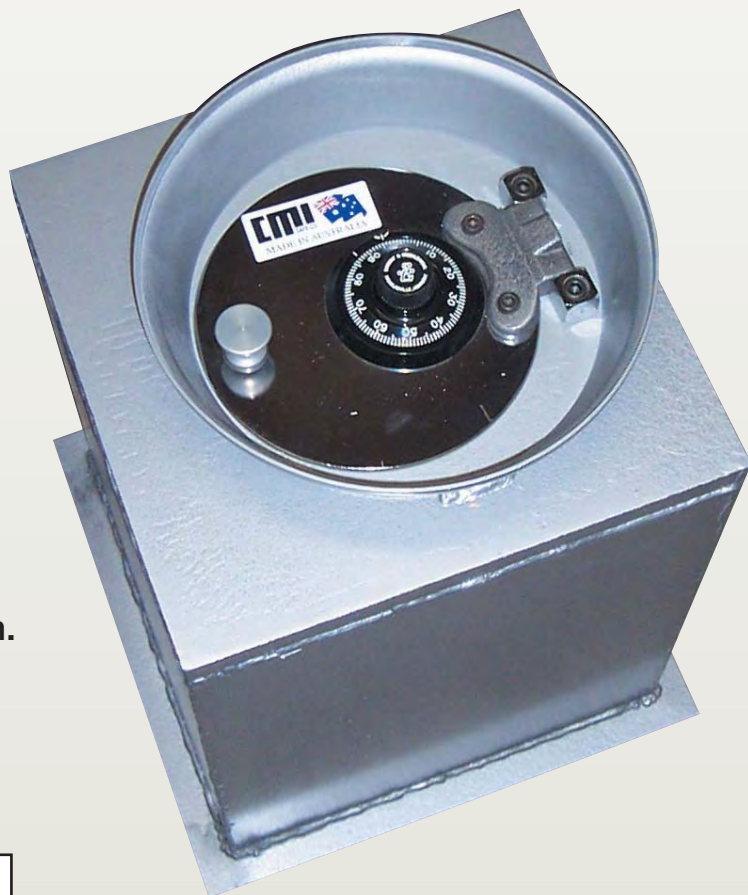

MODEL A14

INSTALLATION

\$

MODEL	CODE	HEIGHT	WIDTH	DEPTH	WEIGHT	PRICE
A14	External	440mm	360mm	360mm	36kg	\$
	Internal	330mm	305mm	305mm		
A9	External	305mm	360mm	360mm	32kg	\$
	Internal	230mm	305mm	305mm		

SUGGESTED INSURABLE CASH RATING FOR AUSTRAL FLOOR SAFES IS AN UNSUPPORTED (NO ALARMS) SITUATION IS \$20,000

CMI SAFE CO. ABN 20 118 637 245

Head Office: 244 West Street, Carlton NSW 2218

Phone: (02) 9547 1488 Fax: (02) 9547 2104

Website: www.cmisafe.com.au

Email: sales@cmisafe.com.au



AVAILABLE FROM

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 12 MONTH WARRANTY ON LOCKS.

MADE IN AUSTRALIA